


DREAMOC XL5 SMARTFRAME

GUIDE AND INSTRUCTIONS TO SET UP PRINT RIGHT

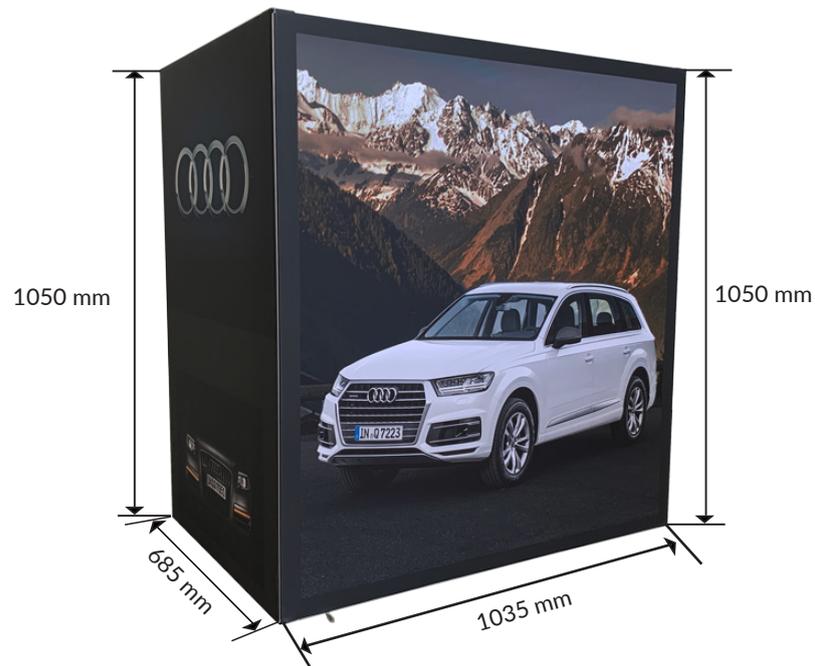

File measurements for stand

- 4 x print pdf files - one for each side in high quality 300 dpi
- Design needs to be for the front and back: H1050mm x W1035mm and for the 2 sides: H1050mm x 685mm with 40mm bleed.

Files needed for design of stand print

- Print or graphics must be in 300 dpi 1:1 (minimum is 100 dpi, but we suggest 300 dpi for best print).
- Colours must be CMYK scale - black is achieved by C:40 M:40 Y:40 K:100.
- Logoes need to be VECTOR for scale - in following format : EPS, IE or PDF. If it is an image the rule of dpi explained in the first bullet point above, is required.
- 40mm bleed with trim marks. The graphics must exceed the print area with 40 mm all around.
- Important colors must have a pantone color.

Send for print

- The four individual PDF's must be uploaded to dropbox or WeTransfer and sent to contact@realfiction.com. Please write "XL5 smartframe" as subject
- The files will be checked by Realfictions graphic designer before sending to print for any errors.
- The estimated time for production is two weeks without delivery.